

MARINE PRODUCT DATA SHEET

OEM 3100-000
AFTERMARKET 3100-001



Aqua Tiger



TYPICAL APPLICATIONS

General plumbing applications where a flooded inlet is provided, such as livewell filling and circulation, liquid transfer, shower pump or washdown systems 12V DC. For other applications, contact SHURflo.

PUMP

Type: Centrifugal Pump
Ports: 3/4" NPTF
Liquid: 130 °F [54 °C] Max
Prime: Flooded Inlet
Inlet PSI: 30 PSI [2.1 Bar] Max
Run Dry: No

ELECTRICAL

Motor: 12VDC Permanent Magnet, Continuous Duty
Protection: External Fuse
Leads: 14 AWG, 17 1/2" [44cm] Red +, 18 1/2" [47cm] Black -
Fuse: 20 Amp Recommended
Control: No Control

MATERIALS

Housing: Stainless Steel
Impeller: Stainless Steel
Hardware: Stainless Steel

APPROVALS

Ignition Protected, ISO 8846

WARRANTY

1 Year Limited Warranty
See SB-1050 For Full Warranty Details


SHIPPING

Net Weight (Boxed): 6.8 Lb [3.1 Kg] each
Carton Weight: 6 each, 41 Lb [18.5 Kg]
Carton Size: 24"L x 18"W x 6"H
[61cm x 46 cm x cm]

RELATED DOCUMENTS

Catalog: MS-030-083 / 030-084
Installation Manual: 911-548
Maintenance: 911-548
Applications Spec Guide: MS-020-005
Warranty: SB-1041 / SB-1050

Parts Kits

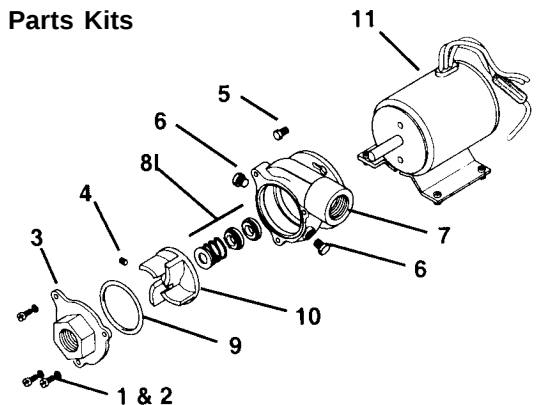

Item	Description	Qty
1	Cover Screw	3
2	Lock Washer	3
3	Cover	1
4	Set Screw (3/32")	1
5	Hex Head Screw (5/16")	2
6	Pipe Plug (7/16")	2
7	Housing	1
8	Mechanical Seal Assembly	1
9	O-ring, Viton	1



MARINE PRODUCT DATA SHEET

OEM

3100-000


AFTERMARKET

3100-001




TYPICAL PERFORMANCE @ 12V DC

PRESSURE		FLOW		CURRENT
BAR	PSI	GPM	LPM	AMPS
0.00	0	23.0	87.0	11.2
0.13	2	22.0	83.0	11.0
0.27	4	18.0	68.0	9.6
0.41	6	15.0	57.0	9.3
0.68	10	0.0	0.0	6.0

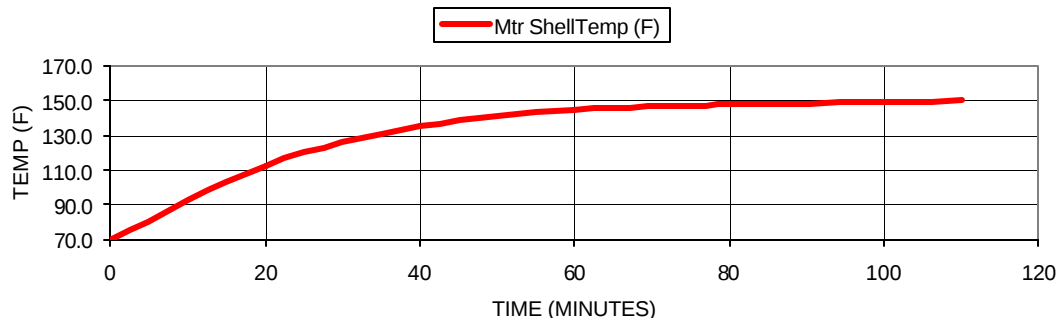

DIMENSIONS [mm]

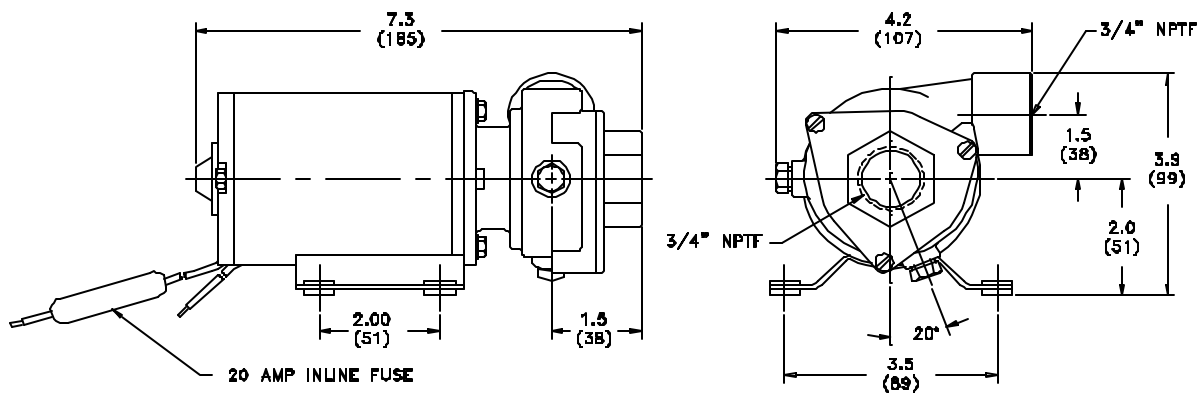

For technical advice or service please take your pump into your local pump service center.

To order pump or parts or for pricing please go to the following links :

[Shurflo Pumps Home >>](#)

[Shurflo Pumps stock list >>](#)